

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 600mm Flexible supplies with G1/2 inlet connections
- Includes rope type waste assembly

OPERATION

- Lever style handle
- Pull-on/Push-off
- Temperature controlled through 100 degree arc of handle travel

FLOW

- Flow rate is about 3.0L/min to 4.5L/min at 0.1 MPa

CARTRIDGE

- Duralast cartridge design

STANDARD

- Designed to meet GB18145; GB25501 (Grade 1)

WARRANTY


- 5 years limited warranty against leaks and drips



Duna

Single Mount One-Handle Lavatory Faucet

MODELS: GN54121 Series

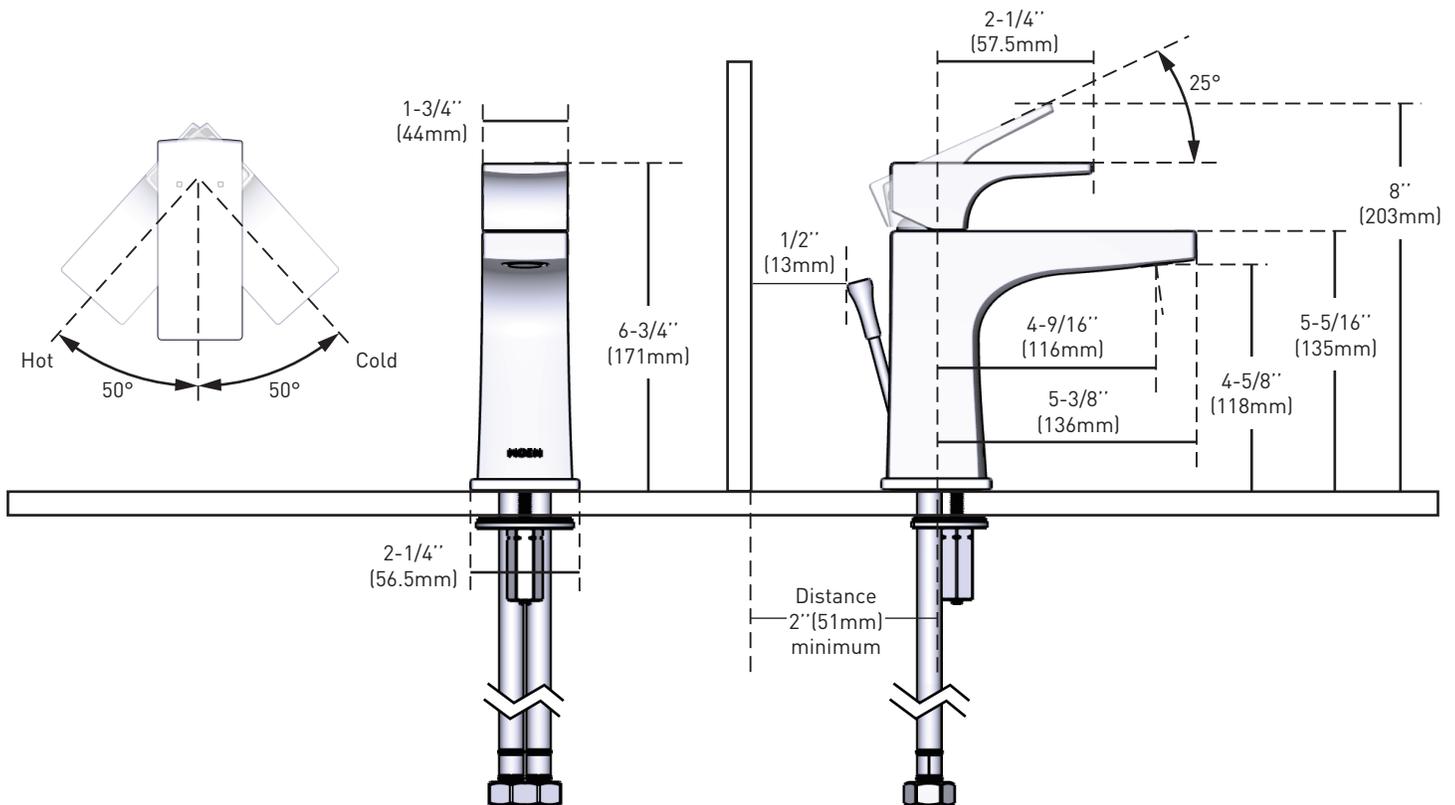

CRITICAL DIMENSIONS DO NOT SCALE