

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 inlet connections and quick connector for outlet flexible hose
- Includes rope type waste assembly
- Includes 600mm flexible inlet hoses

OPERATION

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc by handle travel
- 100mm Lift up / push down spout design

FLOW

- Water flowrate is about 3.0L/min to 4.5L/min at 0.1Mpa
- Water flow difference is limited to 3.0L/min maximum from 0.1Mpa to 0.3 Mpa

CARTRIDGE


- Duralast cartridge design

STANDARDS

- Designed comply with GB 18145; GB25501

WARRANTY




- 5 year limited warranty against leaks and drips

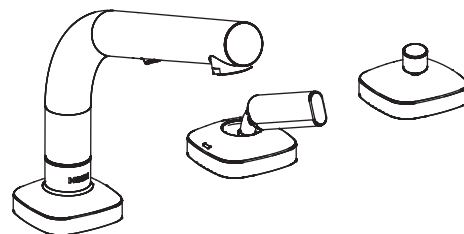

Kerry Series

Pullout Lavatory Faucet

MODELS : GN89123 series

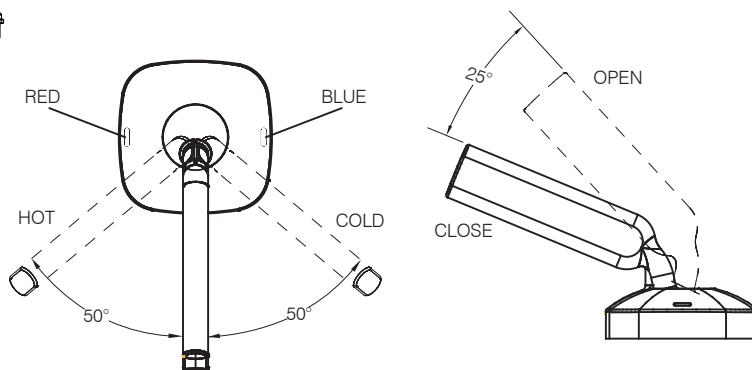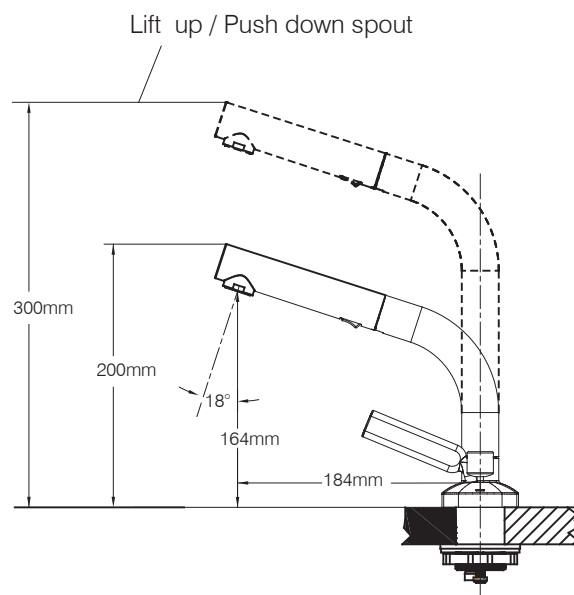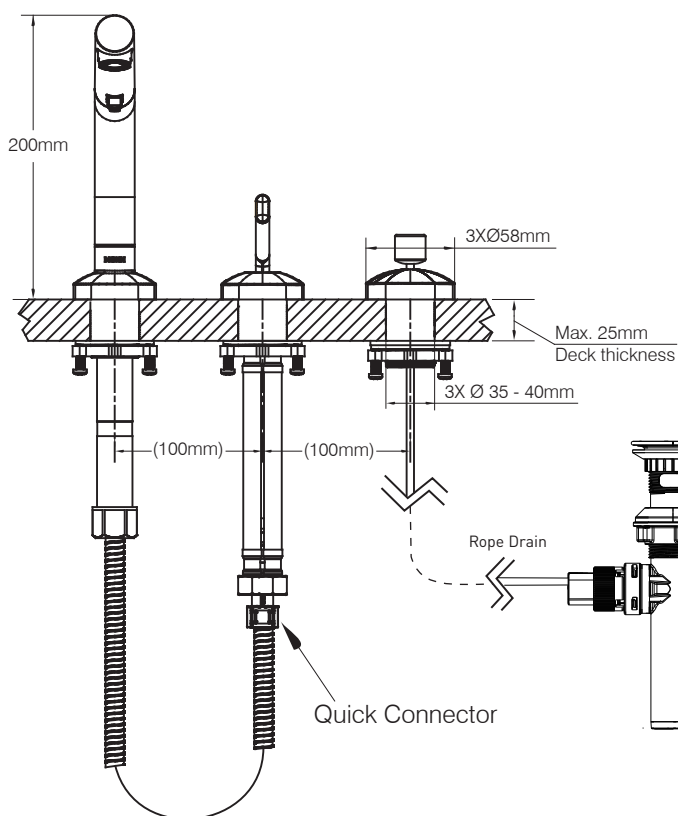

CRITICAL DIMENSIONS DO NOT SCALE